

RUBBER ADJUSTMENT RING



**SOLUTION FOR MANHOLE
STRUCTURE DAMAGE PROBLEMS**

**REDUCE SUBSTRUCTURE
BUDGET MAINTENANCE**

ELIMINATE VIBRATION

ELIMINATE NOISE

WATERTIGHT

QUICK & EASY INSTALLATION

**EXTEND LIFETIME OF
INFRASTRUCTURES**

20 YEAR WARRANTY

MADE OF 100% RECYCLED RUBBER




FLEXO RINGTM

FLEXO RINGTM

CHARACTERISTICS

- Made from 100% recycled rubber
- Superior quality rubber that comes from shredded tires
- Lighter weight
- Compressed and cook in a mould into the desire size and shape
- Meet ISO-9000 quality standard
- Thickness variation between (12 mm) 1/2 " and (75 mm) 3 " by interval of (12 mm) 1/2 "
- Forms according to the frame: round, square or rectangular
- Flat or angled profile

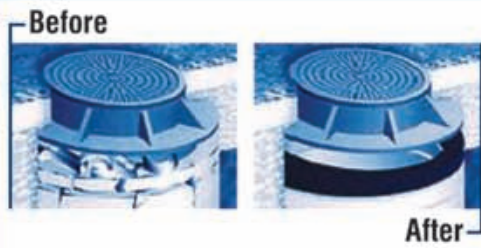

BENEFITS

- Reduce impact on public subterranean structure.
- Reduce budget maintenance
- Allow a better load and wheel impact distribution on street catch basin
- Ecological
- Eliminate traffic vibrations and damage on subterranean structure
- Watertight
- Protect against load concentrated stress on manhole substructure.
- Allow to fit perfectly the subterranean structures in place.
- Uniformly distributed traffic loads over the entire supporting structure
- Quick installation



American Highway Products

11723 Strasburg Bolivar RD. N.W.

Bolivar, OH 44612

Toll Free: 1-888-272-2397

Fax: 330-874-3800

www.ahp1.com